



Short Description

- Self-aligning construction
- Easy load cell access
- Stainless steel
- Lift-off protection
- Stabilized by rod
- Can be used with load cell models: BM8G
- Mount delivered without a load cell. Load cell needs to be ordered separately

Available Models

Model	Capacity	Full Article Description	Part Number
BM-8-410	0.5t – 2t	BM-8-410-0.5/2t BM8G	20850630
	5t – 7.5t	BM-8-410-5/7.5t BM8G	20850640
	10t	BM-8-410-10t BM8G	20850650

Technical Specifications BM-8-410


Capacity with load cell	0.5t – 2t	5t – 10t
Maximum vertical force (down)	15 kN	40 kN
Maximum vertical force (up)	10 kN	25 kN
Maximum force parallel to the stay rod	7.5 kN	20 kN
Maximum horizontal force	5 kN	12 kN
Maximum horizontal movement	+2 / -2 mm	+2 / -2 mm

Note: Expressed maximum forces refer to this mount, without load cell installed.


Specifications and dimensions are subject to change without notice and do not constitute any liability whatsoever.

Dimensions in mm

Side View

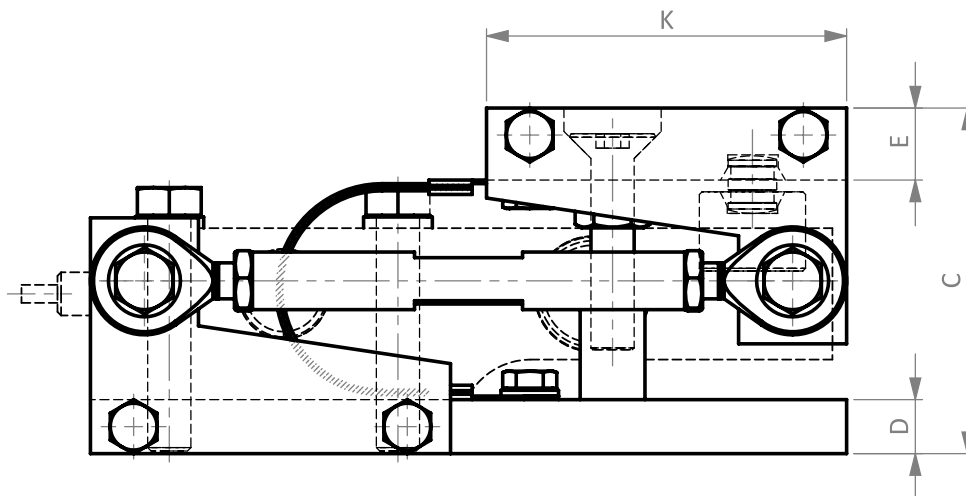

Top View

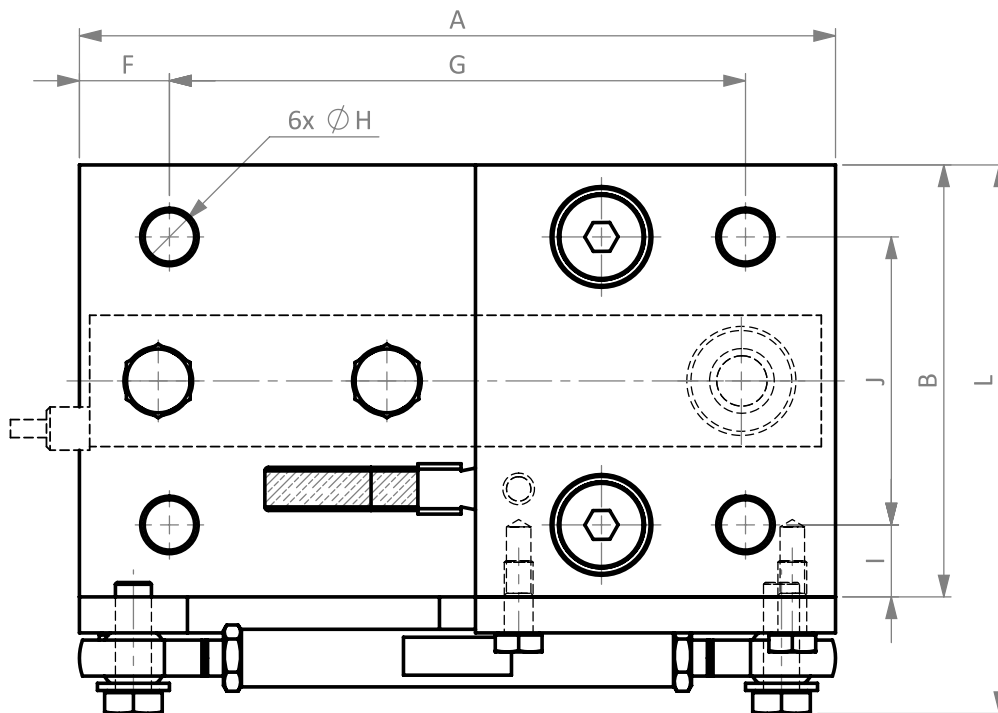

Dimension \ Capacity	A	B	C	D	E	F	G	ØH	I	J	K	L
0.5t – 2t	210	120	96	15	20	25	160	14	20	80	100	153
5t – 7.5t	250	150	138	20	20	25	200	18	25	100	120	186
10t	260	150	153	20	30	25	210	18	25	100	130	195

Specifications and dimensions are subject to change without notice and do not constitute any liability whatsoever.